



Clay Cartridge Vessels

VC Series

Velcon's Standard Canister Design Offers Many Advantages over Bag-Type Design.

BENEFITS

- **Positive Cartridge End Seal**
 - prevents contaminated liquid bypass
- **Lower Purchase Price**
 - the canister design eliminates the need for costly cartridge standpipes
- **Easier, Faster Cartridge Changes**
 - with simple hand tools

DESCRIPTION

VC Series are for use with Velcon clay cartridges in applications such as removing surfactants from jet fuel and acids or products of oxidation from lube and hydraulic oils. The standard design is fitted for canister type cartridges with knife seal mounting hardware. Velcon recommends a standard canister design because it offers many advantages over the bag type.

OTHER STANDARD DESIGN FEATURES


- 150 psi ASME Code construction
- RF flanged connections
- Swing bolt closure with Buna-N O-ring cover seal
- Hydraulic jack cover lift
- Inlet baffle to protect cartridges
- MIL-PRF-4556 epoxy coated interior, primed exterior.

OPTIONAL ACCESSORIES

Velcon recommends automatic air vent, pressure relief valve, differential pressure gauge, and drain valves (2 per vessel). Also available are work platforms, sampling probes and ASME Code Certification.



VC4854285

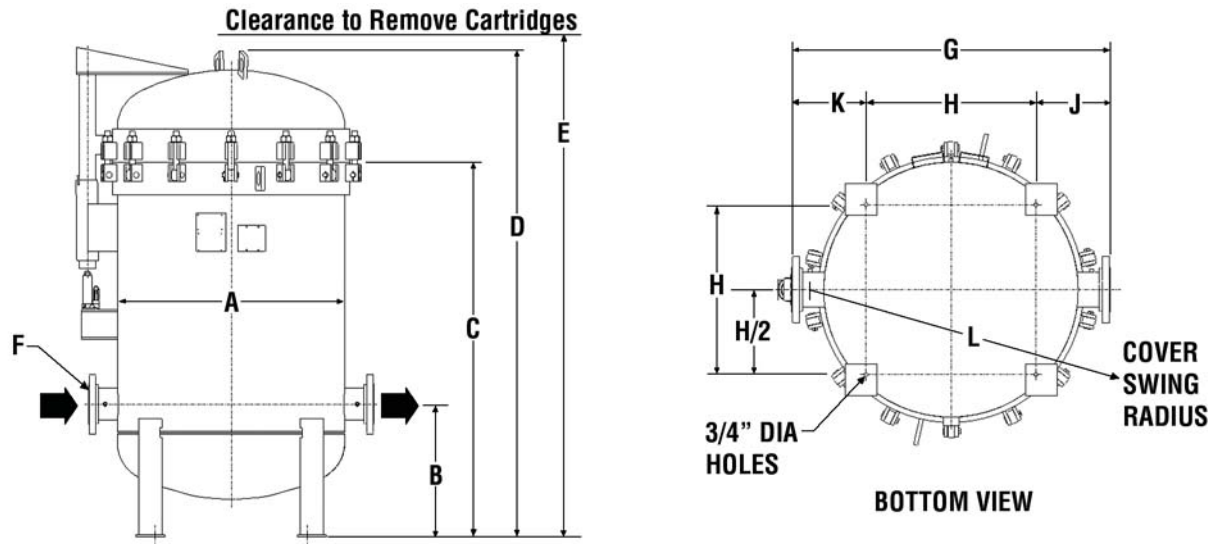

CLAY VESSELS

Vessel Model No.	Flow Rate (Kerosene) USGPM	Cartridges		Dimensions (inches)*											Weight (W/ skid) lbs.	Vol. U.S. Gals.
		Model No.	Qty.	A	B	C	D	E	F	G	H	J	K	L		
VC3636	230	CO-718CE	34	36 ⁵ / ₈	25	57 ³ / ₈	77	77	4	48	23	12 ¹ / ₂	12 ¹ / ₂	43 ¹³ / ₁₆	2125	251
VC3654	340	CO-718CE	51	36 ⁵ / ₈	25	75 ³ / ₈	95	95	4	48	23	12 ¹ / ₂	12 ¹ / ₂	43 ¹³ / ₁₆	2375	331
VC4254	465	CO-718CE	72	42 ³ / ₄	26 ¹ / ₂	77 ¹ / ₂	100	97	6	54	28	13	13	52 ⁹ / ₁₆	3000	468
VC4854	600	CO-718CE	93	48	28	79	103 ¹ / ₈	98	6	60	32	14	14	57 ⁷ / ₈	3500	626
VC5454	800	CO-718CE	120	54 ³ / ₄	29	80	107 ³ / ₄	99	6	66	36 ¹ / ₂	14 ³ / ₄	14 ³ / ₄	65	4100	813
VC6054	1050	CO-718CE	150	60 ³ / ₄	31	81 ⁵ / ₈	112 ¹ / ₂	100	8	72	41	15 ¹ / ₂	15 ¹ / ₂	71	4750	1028
VC6654	1200	CO-718CE	183	67	36	87 ¹ / ₈	118 ⁷ / ₈	108	8	78	45 ¹ / ₂	16 ¹ / ₄	16 ¹ / ₂	75	6500	1275

*Dimensions are shown for estimating purposes. For exact dimensional detail, obtain certified copy of Vessel Drawing.

Note: For tight spaces, clearance to remove clay cartridge is only 2 feet above flange break.

Velcon

Velcon products are sold and serviced by a world-wide representative network. To order, contact Headquarters or your LOCAL REPRESENTATIVE:

COMPANY HEADQUARTERS:
 Velcon Filters, LLC
 1210 Garden of the Gods Road
 Colorado Springs, CO 80907-3410
 Phone: 1.800.531.0180 / 1.719.531.5855
 Fax: 719.531.5690
 e-mail: vfsales@velcon.com
 www.velcon.com

MANUFACTURING PLANTS LOCATED AT:
 Colorado Springs, Colorado
 Sylacauga, Alabama
 Henryetta, Oklahoma

OFFICES AND AFFILIATES IN:
 Canada, Germany, Singapore, & Spain



**Liquid Filtration
 and Separation
 Specialists**