




Fiberglass Filter Cartridges

High Efficiency, Long Life Cartridges for Oils and Fuels

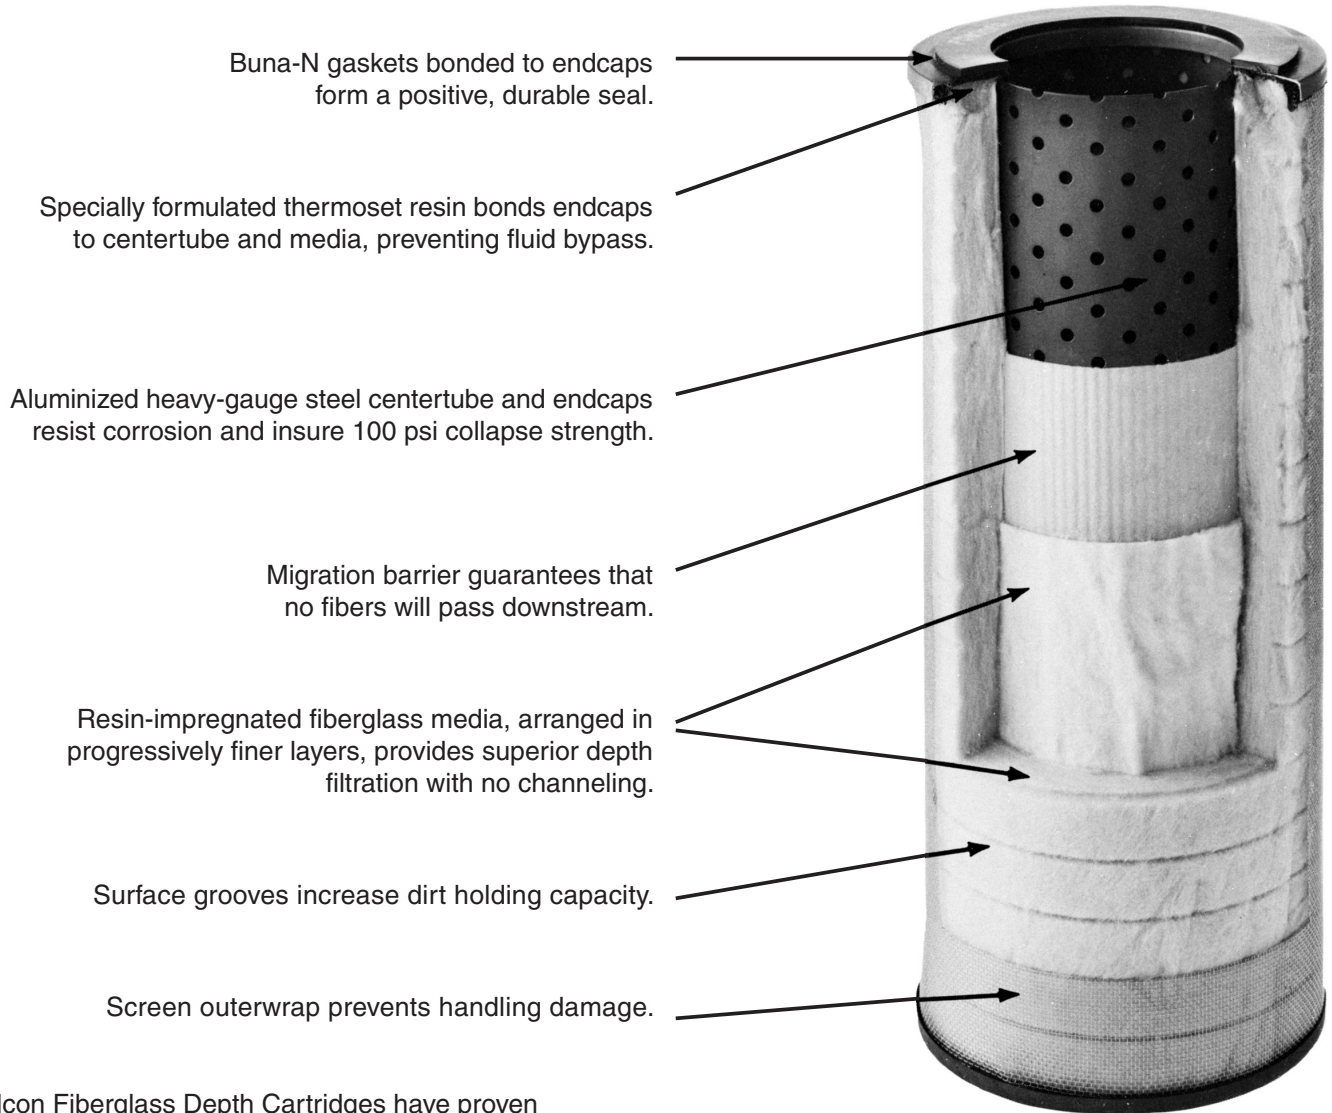

FO-614FG Cutaway

Velcon Fiberglass Depth Cartridges have proven superior in filtering colloidal or slimy contaminants. Lube oil and EDM coolant filtration are this type of application where fiberglass elements consistently filter better with dramatically longer life than other types of media.

APPLICATIONS

Hydraulic Oils
Water Emulsion Coolants
Boiler Feed Water

Cutting Oils
Naphtha
Fuels

Glycols
Lube Oils
Synthetic Oils

Degreasing Fluids
Ethyl Alcohol
Biodiesel

CARTRIDGE INFORMATION

FG SERIES

Velcon Model Number	O.D. (inches)	I.D. (inches)	Length (inches)	Micron Rating
FO-614FG10	6	3½	14½	10
FO-614FG10P*	6	3½	14½	10
FO-614FG25	6	3½	14½	25
FO-618FG10P*	6	3½	18	10
FO-622FG25	6	3½	22	25
FO-629FG2	6	3½	29½	2
FO-629FG2P*	6	3½	29½	2
FO-629FG10	6	3½	29½	10
FO-629FG10P*	6	3½	29½	10
FO-629FG25	6	3½	29½	25
FO-636FG5	6	3½	35⅞	5
FO-636FG10	6	3½	35⅞	10
FO-644FG2	6	3½	44	2
FO-644FG5	6	3½	44	5
FO-644FG25	6	3½	44	25
FO-644FG40P*	6	3½	44	40

*P designates individual unit cartons

FGA SERIES


FO-618FGA5	6	2⅞	18	5
FO-618FGA10	6	2⅞	18	10
FO-618FGA25	6	2⅞	18	25
FO-629FGA5	6	2⅞	29½	5
FO-629FGA10	6	2⅞	29½	10
FO-636FGA5	6	2⅞	35⅞	5
FO-636FGA10	6	2⅞	35⅞	10

The primary difference between FG and FGA Series is the inner diameter

SPECIFICATIONS

100 psi collapse strength
98% + filtration efficiency

5 - 9 operating pH range
250°F maximum operating temperature
Recommended changeout : 25 psid



Velcon products are sold and serviced by a world-wide representative network. To order, contact Headquarters or your **LOCAL REPRESENTATIVE**:

COMPANY HEADQUARTERS:
Velcon Filters, LLC
1210 Garden of the Gods Road
Colorado Springs, CO 80907-3410
Phone: 1.800.531.0180 / 1.719.531.5855
Fax: 719.531.5690
e-mail: vfsales@velcon.com
www.velcon.com

MANUFACTURING PLANTS LOCATED AT:
Colorado Springs, Colorado
Sylacauga, Alabama
Henryetta, Oklahoma

OFFICES AND AFFILIATES IN:
Canada, Germany, Singapore, & Spain



**Liquid Filtration
and Separation
Specialists**