



Horizontal Filter/Separators

HV-xxxx225 Series

Horizontal Filter/Separator Vessels for Fixed Installations at Military Facilities

meeting

**USAF Filter/Separator Specifications
Section 15880**

EASIER CARTRIDGE CHANGE

The horizontal filter/separator design provides more convenient access to the cartridges than the vertical design.

EFFLUENT CLEANLINESS

A horizontal filter/separator must be drained to change the elements. This prevents the possibility of getting dirt in the effluent that can occur if the operator does not fully drain a vertical vessel when changing elements. The separator mounting holes on a horizontal vessel are in a vertical plane at the top of the vessel so it is nearly impossible to get dirt in the effluent when cartridges are being changed.

TESTED AND APPROVED* VESSELS


Velcon HV-xxxx225 Series Horizontal Filter/Separators are qualified to USAF Specification 15880. This specification is similar to API/EI 1581, Fifth Edition, Category M. These vessels incorporate one piece threaded base coalescer elements for easy, reliable installation and reusable one piece Teflon® coated screen separators.

SPECIFICATIONS

- 225 psi ASME Code Construction
- RF Flanged Connections
- Swing Bolted Closure
- Buna-N O-Ring Cover Seal
- Mil-PRF-4556 Epoxy Coated Interior, Primed Exterior

* Approval letters are available upon request.

Teflon® is a registered trademark of E.I. du Pont de Nemours & Co., Inc.

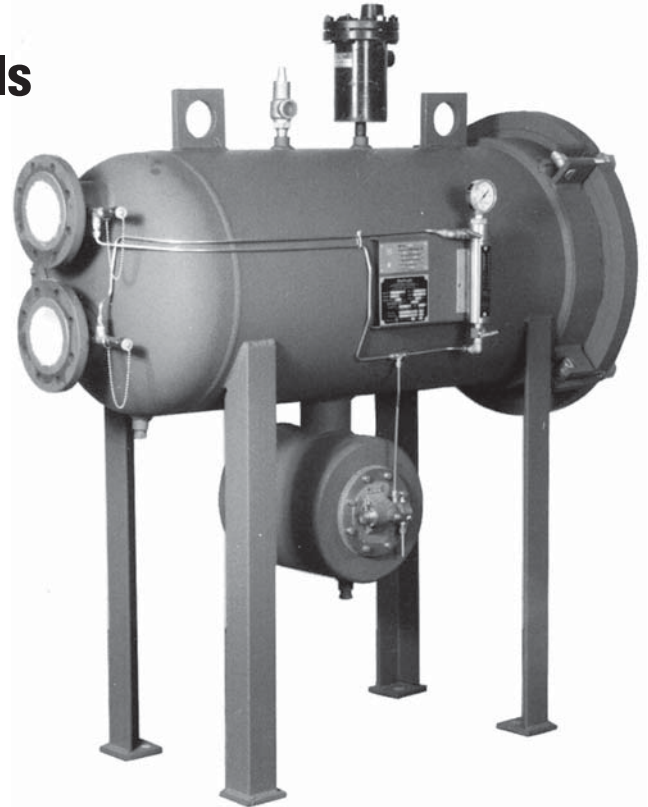

STANDARD ACCESSORIES

In compliance with USAF Specification 15880, the following accessories are included for safe, effective operation:

- Automatic Air Vent with Check Valve
- Pressure Relief Valve**
- Direct Reading Differential Pressure Gauge
- Sampling Probes with Ball Valves
- Stainless Steel Ball Valve Manual Drain
- Sight Gauge with Ball Checks and Colored Density Sensitive Ball
- ASME Code Stamp
- API Nameplate

** Does not meet Mil-V-11201

OPTIONAL ACCESSORIES

- Interface Control
- Water Slug Control Valve

These optional accessories may be supplied directly by the control valve manufacturer, depending on purchase specifications.

Horizontal Filter/Separator Vessels for Fixed Installations at Military Facilities

FLOW RATES AND CARTRIDGES

Vessel Model No.	Flow Rates (1) USGPM	Coalescer Quantity	Cartridge Model No.	Separator Quantity	Cartridge Model No.	Weight with Skid (lbs)	Volume (US gal)
HV2238225	300	4	I-638MMTB	2	SO-430V5	1000	85
HV2838225	600	7	I-638MMTB	2	SO-636V5	1175	140
HV3456225	1200	10	I-656MMTB	3	SO-648V5	2100	335


Note: (1) For Jet A, Jet A-1, Jet B, JP-4, JP-5, JP-8

DIMENSIONAL DATA


Vessel Model No.	Dimensions (inches)*										
	A	B	C	D	E	F (3)	G	H	J	K	L
HV2238225	53	38½	10	59⅛	14½	4	16	30	22	93½	29
HV2838225	55¾	34¼	16¾	62½	15	6	22	22	28	85	27
HV3456225	65¾	37¾	22	83½	19⅞	8	28	38¼	34	94½	38½

Notes: (2) HV2238225 has a flat cover, while the HV2838225 and HV3456225 have domed covers.

(3) Flanges are raised face flanges complying with ANSI B16-5, Class 150.

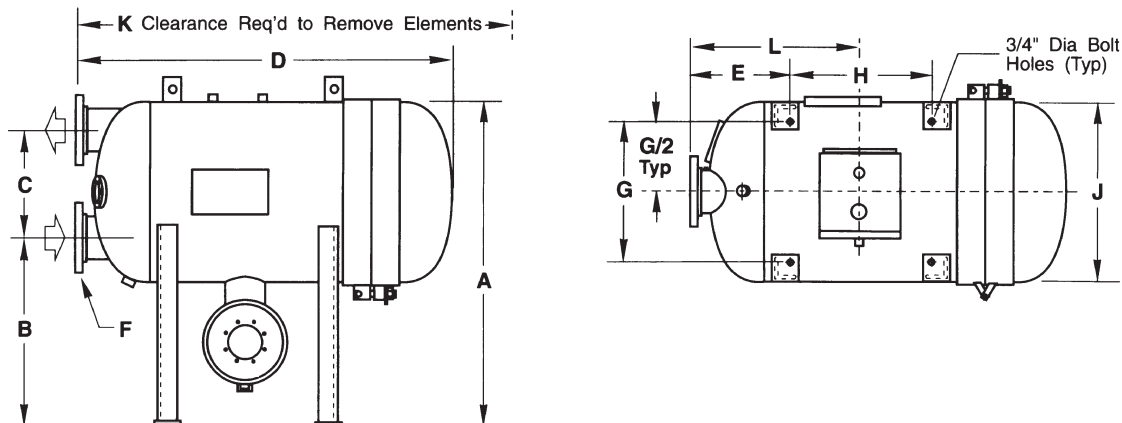

* Dimensions shown are for estimating purposes only. For exact dimensional detail, obtain copy of vessel drawing.



Velcon products are sold and serviced by a world-wide representative network. To order, contact Headquarters or your **LOCAL REPRESENTATIVE**:

COMPANY HEADQUARTERS:
 Velcon Filters, Inc.
 1210 Garden of the Gods Road
 Colorado Springs, CO 80907-3410
 Phone: 1.800.531.0180 / 1.719.531.5855
 Fax: 719.531.5690
 e-mail: vfsales@velcon.com
 www.velcon.com

MANUFACTURING PLANTS LOCATED AT:
 Colorado Springs, Colorado
 Sylacauga, Alabama
 Henryetta, Oklahoma

OVERSEAS AFFILIATES:
 Frankfurt/M., Germany & Singapore

**Liquid Filtration
 and Separation
 Specialists**