



Sump Recovery System

SRS-01 (12V-DC)

SRS-02 (110V-AC)

SRS-03 for Hydrant Equip. (12V-DC)

Cut Fuel Costs Reclaim Sumped Fuel

FEATURES

- 1/2" No-drip quick disconnect fittings
- Hydrokit® Fittings
- Three operating cycles:
 1. Circulation/Bypass cycle for filtering sump sample
 2. Sample/Pressurize cycle for collecting sump sample
 3. Drain /Recovery cycle for recovering sample and charging fuel system
- Operates by electric deadman
- Dual 25 foot hose with hose reel
- Fuel Rated Gear Pump
- System can mount to a flat bed truck, cart, or stationary location
- Closed circuit system
- VF-609 for water absorbing media*

DESCRIPTION

The Sump Recovery System is a closed circuit system for clean and bright fuel testing that allows the tested fuel to be conserved, filtered, and circulated back into the fuel supply.

Velcon's Sump Recovery System is designed to enable operators to re-claim fuel when sumping filter/separators, monitors and other vessels under pressure that may have water in the bottom of the vessel, per ATA 103.

The system can also be used to re-claim fuel during filter change out with auxiliary tank.

BENEFITS

- Recycles and filters sumped fuel to eliminate losses
- Three cycles (Circulation, Sample, and Drain)
- Stainless steel/aluminum system
- Stable system, no need to regularly add fuel to system once initially charged
- Water drain on filter vessel
- Water absorbing media*



SRS 03 for Hydrant Equipment

SPECIFICATIONS

Ordering Information

SRS-01: 12V-DC, 16 Gal, 8 GPM,
Dual 25 Ft Hose Reel;

SRS-02: 110V-AC, 16 Gal, 8 GPM,
Dual 25 Ft Hose Reel

SRS-03: 12V-DC, 64 Gal, 8 GPM,
Dual 25 Ft. Hose Reel

Dimensions/Weight

- **SRS-01 & SRS-02**
 - » 44"D x 40"W x 40"T
 - » 400 lbs (approx)
- **SRS-03**
 - » 96"D x 40"W x 40"T
 - » 550 lbs (approx)

Electrical Specifications

- 12 V-DC/20 amp operation (SRS-01, SRS-03)
- 110V-AC (SRS-02)
- Acceptable for hazardous locations Class I, Div 2


OPTIONS

- Trailer Option for SRS-01 and SRS-03
- Training Video available
- Optional Light for Sample Jar

*Not for use with pre-mixed jet fuel

Patent pending

SUMP RECOVERY SYSTEM

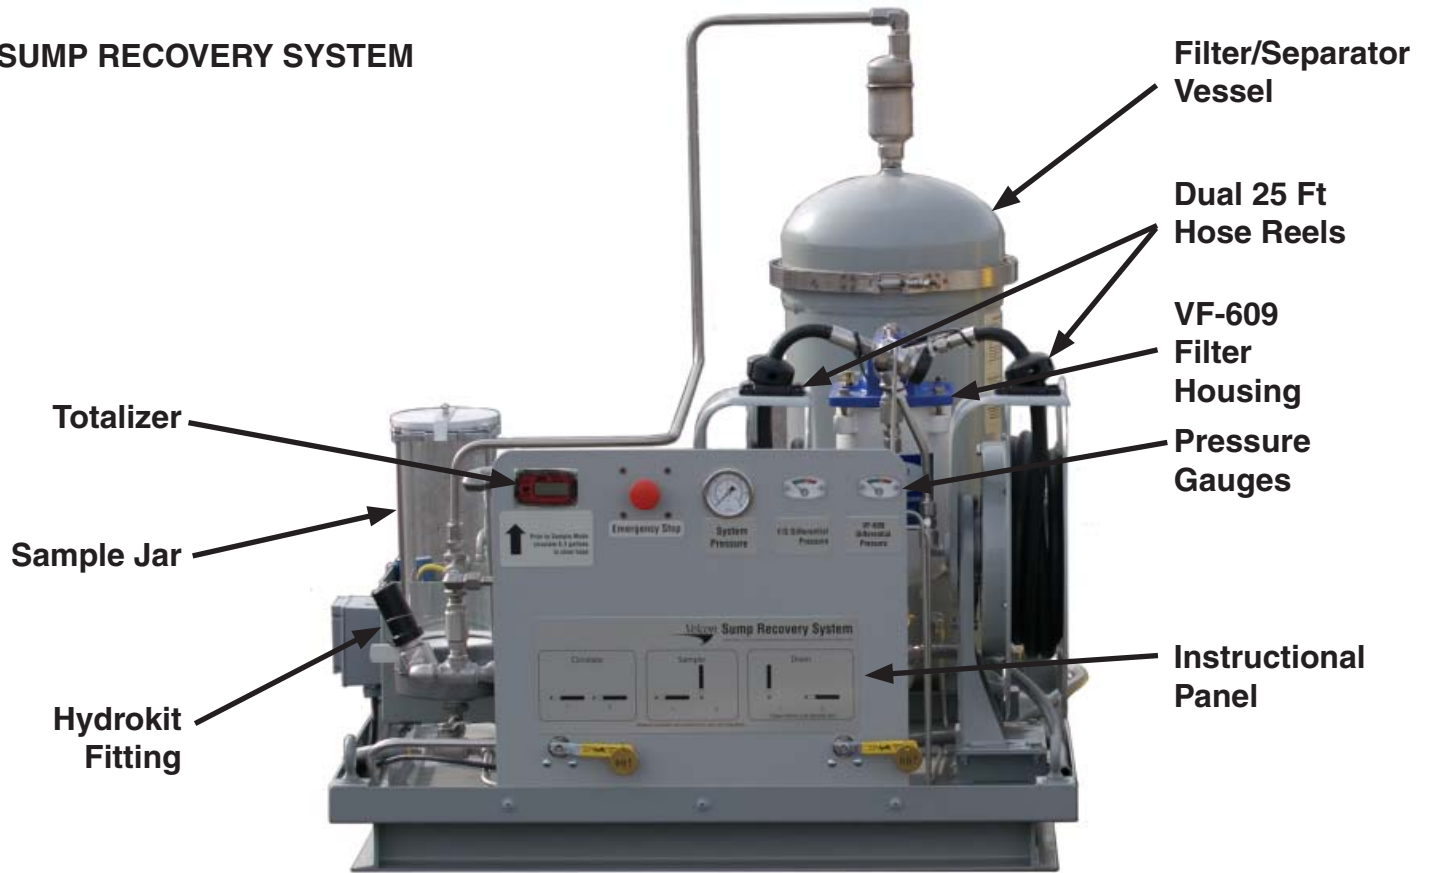

HYDROKIT®



For Hydrokit® information please see datasheet #1955.

CARTRIDGE INFO FOR REORDERING

Filter/Separator Vessel		VF-609 Housing
Coalescer	I-440MMA	ACO-60901LSRS
Separator	SI-522E	

Velcon

Velcon products are sold and serviced by a world-wide representative network. To order, contact Headquarters or your LOCAL REPRESENTATIVE:

COMPANY HEADQUARTERS:
 Velcon Filters, LLC
 1210 Garden of the Gods Road
 Colorado Springs, CO 80907-3410
 Phone: 1.800.531.0180 / 1.719.531.5855
 Fax: 719.531.5690
 e-mail: vfsales@velcon.com
 www.velcon.com

MANUFACTURING PLANTS LOCATED AT:
 Colorado Springs, Colorado
 Sylacauga, Alabama
 Henryetta, Oklahoma

OFFICES AND AFFILIATES IN:
 Canada, Germany, Singapore, & Spain



**Liquid Filtration
 and Separation
 Specialists**